


**Window glazing instruction
Fiberglass Picture window**

1 – Place 1/16” setting blocks at each end with a typical spacing of 16” apart, setting blocks located on all 4 head/sill and sides.

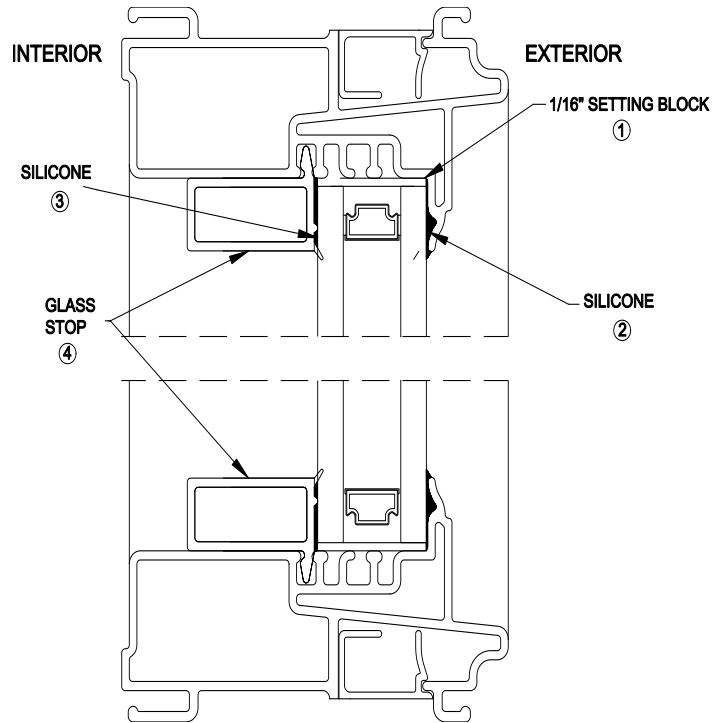

Drawing 1

2 – Apply silicone to the exterior channel covering the whole surface, than apply the sealed unit into the frame.

3 - Apply silicone to the face of the glass stop in contact with the sealed unit.

4 – Install the glass stop into the appropriate grove until it is tightly secured into the window frame.

5 – Clean off all excess silicone from the unit